



ShangHai Decadura Tyre Co., Ltd.
169 Jingxue Road, Malu Town, Jiading District,
Shanghai 201801
Tel: (0086)13301912259 / (0086)021-61557235
Info@Decadura.com
www.Decadura.com

INDUSTRIAL TYRE SOLID TYRE




ShangHai Decadura Tyre Co., Ltd.
DECADURA INDUSTRIALTYRE & SOLID TYRE
PRODUCT CATALOGUE
MANUFACTORY / PORT / LOGISTICS / MINE

COMPANY PROFILE

Shanghai Decadura Tyre Co., Ltd. is located in Malu town of Shanghai. Our products range covers OTR Tyre, Industrial Tyre, Solid Tyre, Military Tyre, Mining Tyre, Agricultural Tyre, Speciality Tyre and Truck and Trailer Tyre, which includes hundreds of types and specifications.

Established in 2007, our company developed broad sales nets in the country. We've also developed our business on exporting all over the world since 2015. After more than 15 years efforts, we've become one of the major tyre manufacturers and distributors in China. We are eager to provide good quality products and services to customers from all over the world.

SOLID TIRES FOR PNEUMATIC TIRES RIMS

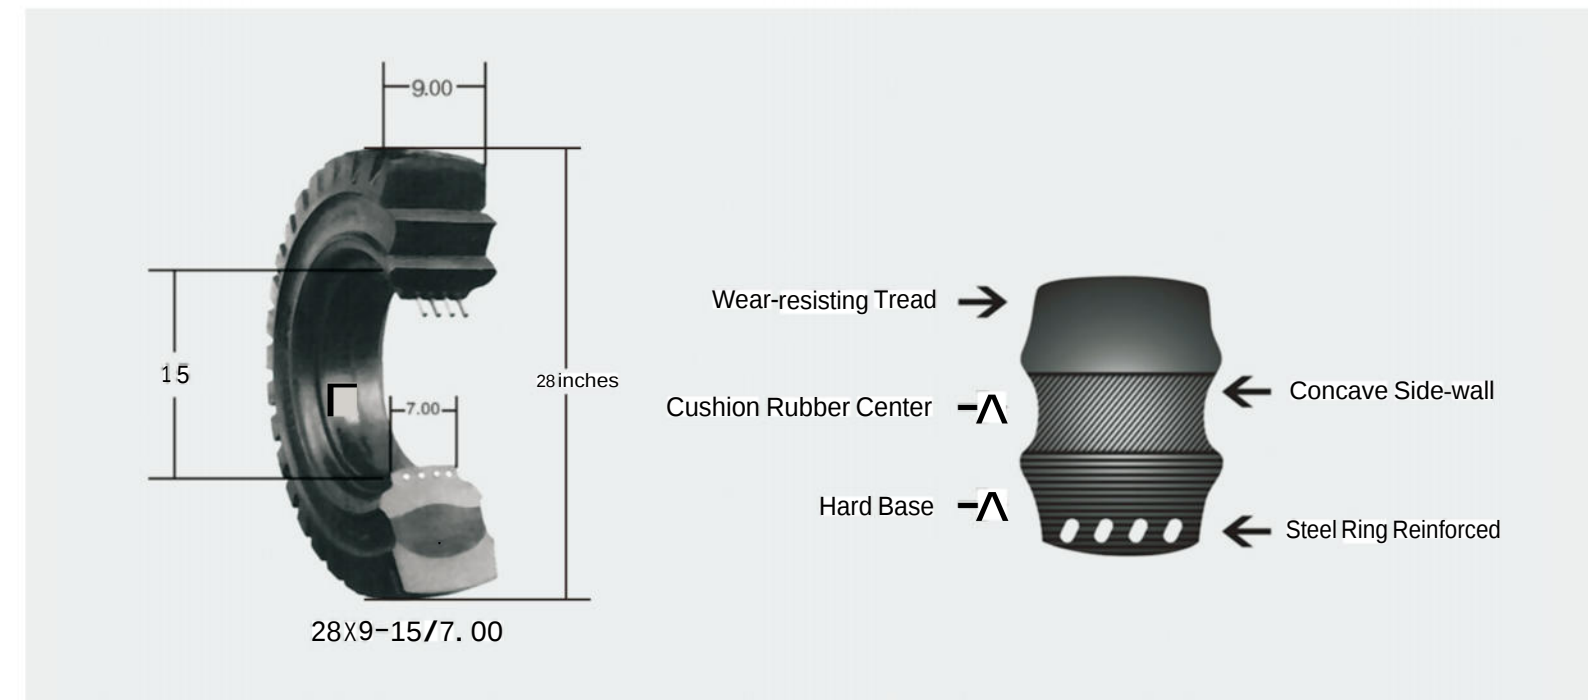

“DECADURA” brand solid tire chooses new tread pattern, truly achieving low price with high quality.

- Three compound construction, new design popular in Europe and America
- Wear resistant tread compound
- Resilient center compound
- Super base compound
- Steel ring reinforced



SOLID TIRES FOR PNEUMATIC TIRES RIMS



B701 B705 B706 B788

No.	Size of Tire	Rim Size	Pattern No.	Outside Diameter	Section Width	Net	Max Load(Kg)						Other Industrial vehicles
							Counter Balanced lift Trucks						
							10km/h		16km/h		25km/h		
				±5mm	±5mm	±1.5%kg	Driving	Steering	Driving	Steering	Driving	Steering	
1	4.00-8	3.00/3.75	B701/B706	410/423	115/120	14.5/12.2	910	700	830	640	765	590	590
2	5.00-8	3.00/3.50/3.75	B701/B705	466	127	18.40	1255	965	1145	880	1060	815	815
3	5.50-15	4.50	B701	666	144	37.00	2525	1870	2415	1790	2195	1625	1495
4	6.00-9	4.00	B701/B705/B788	533	140	26.80	1975	1520	1805	1390	1675	1290	1290
5	6.00-15	4.50	B701	694	148	41.20	2830	2095	2705	2000	2455	1820	1675
6	6.50-10	5.00	B701/B705/B788	582	157	36.00	2715	2090	2485	1910	2310	1775	1775
7	7.00-9	5.00	B701	550	164	34.20	2670	2055	2440	1875	2260	1740	1740
8	7.00-12	5.00	B701/B705/B788	663	163	47.60	3105	2390	2835	2180	2635	2025	2025
9	7.00-15	5.50/6.00	B701	738	178	60.00	3700	2845	3375	2595	3135	2410	2410
10	7.50-15	5.50	B701	768	188	75.00	3805	2925	3470	2670	3225	2480	2480
11	7.50-16	6.00	B701	805	180	74.00	4400	3385	4025	3095	3730	2870	2870
12	8.25-12	5.00	B701	732	202	71.80	3425	2635	3125	2405	2905	2235	2235
13	8.25-15	6.50	B701/B705	829	202	90.00	5085	3910	4640	3570	4310	3315	3315
14	15*4%-8	3.00	B701/B705	383	107	9.40	1005	775	915	705	850	655	655
15	16*6-8	4.33	B701/B705	416	156	16.90	1545	1190	1410	1085	1305	1005	1005
16	18*7-8	4.33	B701/B705	452	155	20.80	2430	1870	2215	1705	2060	1585	1585
17	18*7-9	4.33	B701/B705	452	155	19.90	2230	1780	2150	1615	2005	1505	1540
18	21*8-9	6.00	B701/B705	523	180	34.10	2890	2225	2645	2035	2455	1890	1890
19	23*9-10	6.50	B701/B705	595	212	51.00	3730	2870	3405	2620	3160	2430	2430
20	23*10-12	8.00	B701/B705	592	230	51.20	4450	3425	4060	3125	3770	2900	2900
21	27*10-12	8.00	B701/B705	680	236	74.70	4595	3535	4200	3230	3900	3000	3000
22	28*9-15	7.00	B701/B705/B788	700	230	63.00	4060	3125	3710	2855	3445	2650	2650
23	28*12.5-15	9.75	B705	706	300	86.00	6200	4770	5660	4355	5260	4045	4045
24	140/55-9	4.00	B705	380	130	10.50	1380	1060	1260	970	1170	900	900
25	200/50-10	6.50	B701/B705	458	198	25.20	2910	2240	2665	2050	2470	1900	1900
26	250-15	7.00/7.50	B701/B705	726	235	73.60	5595	4305	5110	3930	4745	3650	3650
27	300-15	8.00	B701/B705	827	256	112.50	6895	5305	6300	4845	5850	4500	
28	355/65-15	9.75	B701	825	302	135.00	7800	5800	7080	5310	6000	4800	5450

SOLID TIRES FOR PNEUMATIC TIRES RIMS

SOLID OTR TIRES



B700 B706 B708 B709 B711

No.	Size of Tire	Rim Size	Pattern No.	Outside Diameter	Section Width	Net Weight(Kg)	MaxLoad(Kg)						Other Industrial vehicles
							Counter Balanced lift Trucks						
							10km/h		16km/h		25km/h		
				±5mm	±5mm	±1.5%kg	Driving	Steering	Driving	Steering	Driving	Steering	25km/h
1	8.25-20	6.50/7.00	B701	976	217	123	5335	4445	4870	4060	4525	3770	3770
2	9.00-16	6.00/6.50/7.00	B701	880	212	109	5290	4070	4830	3715	4485	3450	3450
3	9.00-20	7.00/7.50	B701	1005	236	148	6365	5305	5815	4845	5400	4500	4500
4	10.00-20.	6.00/7.00/7.50/8.00	B701	1041	248	170	7075	5895	6460	5385	6000	5000	5000
5	10.00-20	7.50/8.00	B700	1041	248	176	7075	5895	6460	5385	6000	5000	5000
6	11.00-20	7.50/8.00	B701	1058	270	193	7715	6430	7045	5870	6540	5450	5450
7	12.00-20	8.00/8.50	B701	1112	285	230	8920	7435	8140	6785	7560	6300	6300
8	12.00-24	8.50	B701	1218	300	280	9125	7605	8335	8335	7740	6450	6450
9	14.00-20	10.00	B706	1250	316	340	10800	8640	10430	7840	9730	7315	7315
10	14.00-24	10.00	B701	1340	328	389	12165	10135	11105	9255	10315	8595	8595
11	16.00-25	11.25	B711	1446	390	600	16860	13490	15170	11400	13480	10130	10130
12	17.5-25	14.00	B709	1368	458	568	17720	14180	16880	12690	15960	12000	12000
13	18.00-25	13.00	B711	1620	500	928	21200	16960	20480	15400	19100	14360	14360
14	20.5-25	17.00	B709	1455	500	750	24430	18820	22290	17170	20660	15880	15880
15	23.5-25	19.50	B709	1620	580	1080	30830	24660	29790	22400	27770	20880	20880
16	26.5-25	22.00	B709	1715	642	1460	39300	31400	37400	28100	35400	26600	26600
17	29.5-25	25.00	B709	1840	730	1690	48100	37055	43880	33800	40340	31265	31265
18	10*16.5 (30*10-16)	6.00-16	B708	788	250	85	Φ71(With Hole)						3330
19	12*16.5(33*12-20)	8.00-20	B708	840	275	95	Φ71(With Hole)						4050
20	38.5*14-20(14*17.5)	11.00-20	B708	966	350	180	Φ71(With Hole)						6360
21	385/65-24(385/65-22.5)	10.00-24	B708	1062	356	208	Φ71(With Hole)						6650
22	445/65-24(445/65-22.5)	12.00-24	B708	1152	428	312	Φ71(With Hole)						9030
23	18-20	12.00-20	B708	1000	440	325	Φ71(With Hole)						8950

SPECIAL TIRESFOR TRAILERS



R700 R701 R706 R707 R713 R716

No.	Size of Tire	Rim Size	Pattern No.	Outside Diameter	Section Width	Net Weight(Kg)	MaxLoad(Kg)
				±5mm	±5mm	±1.5%kg	Other Industrial vehicles 16km/h
1	2.00-8(12*4)	2.50/3.00	B700/B706/B707	318/310	103/100	5.00	380
2	3.00-5	2.15	B713/B716	268/250	77/72	3.70	330
3	3.20-8	3.00	B706	328	110	6.20	520
4	3.50-5	3.00	B701	300	100	6.30	380
5	3.60-8	3.00	B706	368	110	8.60	600
6	4.00-4	2.50C	B701	300	100	6.00	380
7	4.00-8(Wide)	3.75	B706	423	120	14.50	730
8	4.00-8	3.00/3.75	B701/B706	410	115	12.20	695
9	16*5-9	3.50/4.00	B706	404	126	1250	710
10	300*125	FB	B700	302	125	11.30	910
11	350*100	FB	B700	352	100	12.30	850

SOLID TIRES WITH RIMS

SKID STEER SOLID TIRES WITH RIMS



NO .	SIZE OF TIRE	TIRE WITH HOLE (YES/NO)	PATTERN NO.	OUTSIDE DIAMETER ±5MM	SECTION WIDTH ±5MM	NET WEIGHT(KG) ±1. 5%KG	MAX LOAD(KG) OTHER INDUSTRIAL VEHICLES 16KM/H
1	FB10*16.5(30*10-16)	YES	B708	788	250	116	3700
2	FB12*16.5(33*12-20)	YES	B708	840	275	140	4500
3	FB16/70-20	YES	B708	1060	400	329	8830
4	FB16/70-20(16*7-20)	YES	B708	940	330	216	6620
5	FB38.5*14-20(14*17.5)	YES	B708	966	350	246	7070
6	FB385/65-24(385/65-22.5)	YES	B708	1062	356	290	7390
7	FB445/65-24(445/65-22.5)	YES	B708	1152	428	394	10040
8	FB14.00-24	NO	B701	1340	328	461	10700
9	FB17.5-25	YES	B709	1368	458	650	13400
10	FB18.00-25	YES	B711	1620	500	960	15795
11	FB20.5-25	NO	B709	1455	500	950	17470
12	FB23.5-25	YES	B709	1620	580	1040	23400
13	FB26.5-25	YES	B709	1715	642	1395	29260
14	FB29.5-25		B709	1840	730	1780	34390

SOLID TIRES FOR MINING MACHINE

NO .	SIZE OF TIRE	RIM SIZE	PATTERN. NO.	OUTSIDE DIAMETER ±5MM	SECTION WIDTH ±5MM	MAX LOAD(KG) OTHER INDUSTRIAL VEHICLES 16KM/H
1	8.25-20	FB	B701	976	217	4230
2	10.00-20	FB	B701	1041	248	5300
3	12.00-24	FB	B701	1218	300	7690
4	14.00-20	FB	B706	1250	316	9495
5	14.00-24	FB	B701	1340	328	10700
6	16.00-25	FB	B711	1460	410	13340
7	17.5-25	FB	B709	1368	458	13400
8	20.5-25	FB	B709	1455	500	17660
9	18.00-33	FB	B715	1840	450	18380
10	54*26	FB	B715	1370	660	23130
11	55*18-34	FB	B715	1410	450	15050
12	1510*470	FB	B715	1516	470	16120
13	1098*500	FB	B711	1098	500	14235

SOLID TIRES WITH RIMS



● CHARACTERISTICS OF STRUCTURE

The wheel baseband is made according to the fitting specifications of the vehicles' pivot bracket. And the thickness and the structure can be adjusted based on the tire loading. After treating to the basebands, curing reasonable rubber around the baseband surface to guarantee the loading of tires and other usage performance.

● CHARACTERISTICS OF USAGES

- 1 .Smaller deformation, better stability and security
- 2 .Running smoothly, slight shaking and twittering
- 3 .Low rolling resistance, reducing energy consumption, basebands can be recycled reducing cost and in accordance with the world trend of low-carbon economy.
- 4 .Lower heat built up, good heat yield, overcome the blow-out problem
- 5 .Easy assembling, no need to fit rims. can be fixed to the vehicles and facilities directly, no worry for spinning
- 6 .Heavier loading 10-15, increase of loading than the same size of tires

● SOLID TIRES FOR SINTERING MACHINE

No.	Size of Tire	Rim Size	Pattern No	Outside Diameter ± 5mm	Section Width ± 5mm	Net Weight(Kg) ± 1.5%kg	Max Load(Kg) Other Industrial vehicles 16km / h
1	12 .00-20	FB	R701	1112	285	258	7645
2	14 .00-20	FB	R706	1250	316	400	9496



SOLID TIRES FOR LIFTING PLATFORM




B700 B706 B707 B712 B713 B714

No.	Size of Tire	Rim Size	Pattern No.	Outside Diameter	Section Width	Net Weight (Kg)	Max Load(Kg)
				5mm±	5mm±	1.5%kg±	Other Industrial vehicles 10Km/h
1	10×3	FB	B706	256	79	7.50	4.25
2	10×4	FB	B706	256	102	5.90	630
3	12×4(With brake)	FB	B707	310	100	7.4/10.4	680
4	12×4(W/O brake)	FB	B707	310	100	6.9/9.5	680
5	12x4. 5	FB	B707/B712	310	115	15.00	820
6	12.5x4. 25	FB	B712	320	108	18.00	810
7	14x4 1/2	FB	B713	358	114	13.50	920
8	15x5	FB	B712	384	127	21.80	1095
9	16x5x12(With brake)	FB	B706	406	125	15.2/18.8	1265
10	16x5x12(W/O brake)	FB	B706	406	125	14/17.3	1265
11	227×17 3/4	FB	B714	561	178	50.00	2270
12	323×100	FB	B713	323	100	9.10	6.35
13	406x125(16x5x12)	FB	B706	406	125	16.90	1265
14	406x127	FB	B713	406	127	20.60	1265
15	2.00-8(12x4)	2.50/300	B700/B706/B707	318/310	103/100	5.00	620
16	3. 00-5	2.15	B713/B716	268/250	77/72	3.70	335
17	600x190	FB	B706	604	190	55.20	2670
18	640x170x560	FB	B700	640	170	63.50	2340
19	630x203x508	FB	B700	630	203	70.50	3110



PRESS-ON SOLDTIRES

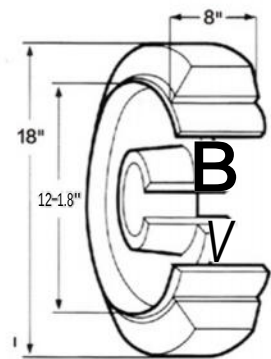

18 X 8 X 121₈




R700



R710

No.	Size of Tire		NetWeight(Kg)			Max Load(Kg)				
			Type of Pattern	±1.5%kg	10Km/h		16Km/h		Other Industrial	
	Inch(in)	Millimeter(mm)			Driving	Steering	Driving	Steering	vehicles 16Km/h	
1	9x5x5	22836x127x127	B700	6.50	890	790	785	715	685	
2	10x4x6 1/2	254x101.6x165.1	B700	6.00	720	640	635	580	555	
3	10 x 5x6 1/2	254x127x165.1	B700	7.40	940	835	830	755	725	
4	10x6x6 1/2	254x152.4x165.1	B700	9.00	1160	1035	1030	935	895	
5	10 1/2x5x5	266.7x127x127	B700	8.00	1020	910	905	820	785	
6	10 1/2x5x5	266.7x152.4x127	B700	10.40	1295	1155	1145	1040	995	
7	10 1/2x5x6 1/2	266.7x127x165.1	B700	8.20	1000	890	885	805	770	
8	10 1/2x6x6 1/2	266.7x152.4x165.1	B700	9.60	1240	1105	1100	995	955	
9	10 x 4 1/2x8	305x114.3x203.2	B700	8.60	970	865	860	780	745	
10	12x5x8	205x127x203.2	B700	10.00	1050	970	1020	950	950	
11	10 1/2x5 1/2x8	342.9x139x203.2	B700	13.00	1400	1245	1235	1125	1075	
12	13 1/2x7 1/2x8	342.9x190.5x203.2	B700	20.00	2065	1835	1825	1660	1590	
13	14x4 1/2x8	355.6x114.3x203.2	B700/B710	12.20	1085	965	960	870	835	
14	15x5x11 1/2	381x127x285.8	B700	12.60	1290	1150	1145	1040	995	
15	15 1/2x5x10	393.7x127x254	B700	14.00	1365	1215	1210	1100	1050	
16	15 1/2x6x10	393.7x152x254	B700	16.80	1735	1545	1535	1395	1335	
17	16x5x10 1/2	406.4x127x266.7	B700/B710	16.00	1400	1245	1240	1125	1075	
18	16x6x10 1/2	406.4x152.4x266.7	B700/B710	19.27	1775	1580	1570	1430	1365	
19	16x7x10 1/2	406.4x178.8x266.7	B700/B710	21.10	2155	1915	1905	1730	1655	
20	16 1/2x5x11 1/4	413x127x285	B700/B710	14.60	1415	1260	1250	1135	1090	
21	16 1/2x6x11 1/4	413x152x285	B700/B710	17.60	1780	1585	1575	1480	1370	
22	16 1/4x7x11 1/4	413x178x285	B700/B710	20.00	2150	1915	1900	1730	1655	
23	17x5x12 1/8	431.8x127x308	B700	16.00	1460	1300	1295	1175	1125	
24	18x5x12 1/8	457.2x127x308	B700	18.00	1525	1355	1350	1225	1175	
25	18x6x12 1/8	457x152x308	B700/B710	23.50	1945	1735	1720	1565	1500	
26	18x7x12 1/8	457x178x308	B700/B710	28.03	2370	2110	2095	1905	1905	
27	18x8x12 1/8	457x203.2x308	B700/B710	30.10	2790	2485	2470	2245	2145	
28	18x9x12 1/8	457x229x308	B700/B710	32.00	3215	2860	2840	2580	2470	
29	20x8x16	508x203.2x406.4	B700/B710	28.40	2795	2490	2475	2250	2150	
30	20x9x16	508x228.6x406.4	B700/B710	35.50	3190	2840	2820	2565	2455	
31	21x7x15	5. x178x381	B700/B710	33.60	2665	2370	2370	2140	2050	
32	21x8x15	533.4x203.2x381	B700/B710	38.60	3140	2795	2795	2525	5415	
33	21x9x15	533.4 x 228.6x381	B700/B710	41.00	3620	3220	3220	2910	2785	
34	22x8x16	558.8x203.2x406.4	B700	38.00	3255	2895	2895	2615	2500	
35	22x9x16	559x229x406	B700/B710	43.00	3745	3335	3335	3010	2880	
36	22x12x16	559x305x406	B700	62.00	5230	4655	4655	4205	4025	
37	22x14x16	559x355.6x406	B700	69.00	6220	5535	5535	5000	4785	
38	22x16x16	559x406x406	B700	79.00	7205	6415	6415	5795	5545	
39	26x10	660x250x480	B700	68.00	4845	4810	4810	3895	3725	
40		620x250x480	B700	59.00	4520	4070	4070	3595	3475	
41	28x12x22	711x304x558.8	B700	79.30	6565	5575	5575	5035	4820	
42	28x14x22	711x355.6x558.8	B700	95.00	7450	6630	6630	5990	5730	
43	28x16x22	711x406.4x558.8	B700	110.00	8635	8635	8635	6940	6645	
44	36x9x30	914.4x229x762	B700		5420	4825	4795	4360	4170	
45	36x10x30	914.4x254x762	B700		6135	5460	5430	4935	4720	
46	36x12x30	914.4x305x762	B700		7565	6735	6695	6080	5820	
47	36x14x30	914.4x355.6x762	B700		8995	8000	7960	7230	6920	
48	36x16x30	914.4x406.4x762	B700		10425	9280	9225	8380	8020	
49	40x10x30	1016x254x762	B700		7200	6300	6250	5615	5320	
50	40x12x30	1016x305x762	B700		8865	7865	7805	7115	6820	
51	40x14x30	1016x355.6x762	B700		10750	9535	9475	8625	8270	
52	40x16x30	1016x406x762	B700		12595	11210	11140	10125	9690	

TUBE SERIES

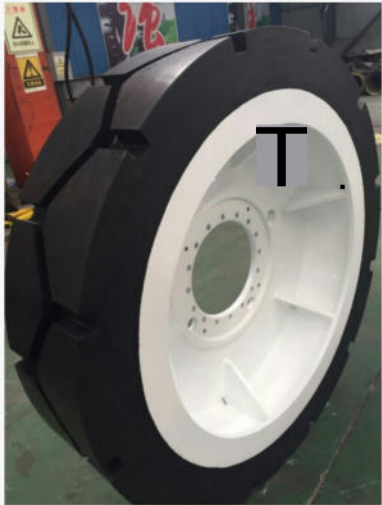

PRODUCT APPLICATION

